

Electrical Parameters


Nominal Voltage	12V
Number of Cells	6
Rated Capacity (C10 to 1.80V per Cell)	200Ah
Charge Voltage at 25 °C	
- Float Charge Voltage Range (V)	13.4 - 13.7V
- temperature compensation coefficient (mV/°C) per cell	-3mV/Cell °C
- Cycle Charge Voltage Range (V)	14.1 - 14.4V
- temperature compensation coefficient (mV/°C) per cell	-4mV/Cell °C
Max Charge Current	50A
Max Discharge Current	600A
Self-Discharge rate at 25 °C	3% per month
Electrical Connection	2P max.



EGE- 12V 200Ah

Environmental Parameters

Recommended Operating Temperature Range	15 - 25°C
Operating Temperature Range	
- Discharge	-45 - 50°C
- Charge	-20 - 45°C
Storage Temperature Range	-30 - 40°C

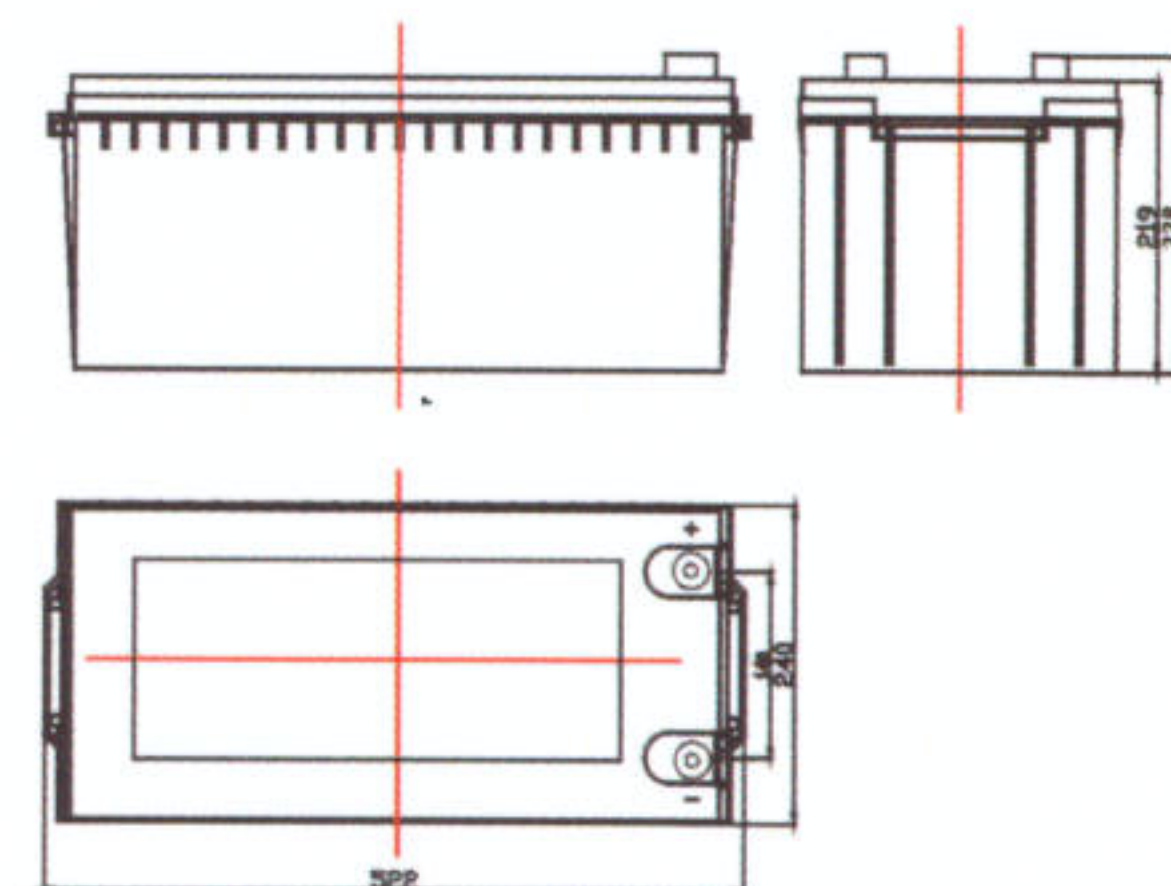

Mechanical Parameters

Dimensions (L*W*H)	522*240*219mm
Total height	228mm
Weight	56.7kg
Terminal Bolt Size	M8
Recommended Terminal Torque Range	12-15Nm
Cover Material	ABS